



InfiMAN 2x2 3 GHz is InfiNet's latest family of solutions, designed to operate in 3.1 to 4.0 GHz licensed bands. It comprises a number of high-performance broadband wireless point-to-multipoint systems, designed primarily to cater for the specific requirements of service providers, local authorities and organisations that have purchased WiMAX licences.

The innovative base stations provide an unparalleled sector capacity of up to 240 Mbps and use leading-edge radio protocols to provide unrivalled spectral efficiency. They enable operators to deploy more efficient and scalable networks for data, video and voice transmission, whilst at the same time offering up to five times the throughput of existing systems in this frequency range.

Compared to traditional point-to-multipoint systems, both operating range and link reliability have increased significantly through the use of advanced Multiple Antenna Technology and Adaptive Multipoint Access Protocol.

The **InfiMAN 2x2 3 GHz** series represents a unique proposition to operators who have already invested in a WiMAX license but now wish to deliver Fast Ethernet data, voice and video services over long distances, whilst at the same time providing a wide set of networking features and maintaining strict QoS control.

Applications


- ▶ Triple-play services for Wireless ISPs operating in licensed bands
- ▶ Guaranteed-availability CCTV and video surveillance networks
- ▶ Long-range rural connectivity

2X2 TECHNOLOGY

MIMO stands for Multiple Input / Multiple Output. This innovative technology is based on the use of two antennas at both the transmitter and receiver to improve communication performance.

InfiMAN 2x2 **3.1 – 4.0 GHz** Frequency Bands

Key Features and Benefits

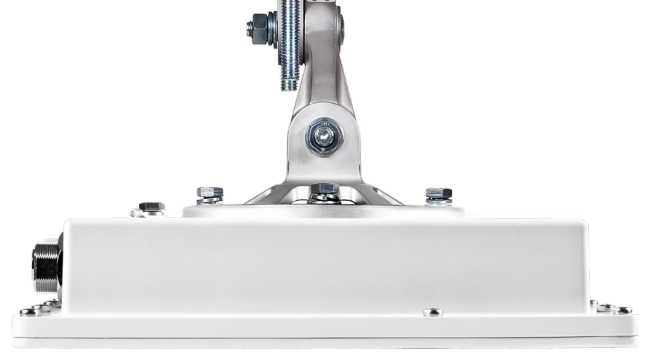

- ▶ Available in 3.1 to 4.0 GHz licensed frequency bands
- ▶ Unrivaled spectral efficiency of 6.5 Bit/s/Hz
- ▶ Increased NLOS range and performance
- ▶ 3.5/5/7/10/14/15/20/28/30/40 MHz channel widths
- ▶ Advanced Quality of Service (QoS) features, offering a reliable and robust solution
- ▶ High Transmit Power Base Stations
- ▶ Integrated sector antenna base stations, ensuring maximum RF performance and quick and simple installation
- ▶ CCTV optimised subscriber terminals with PoE output for camera power supply

Solution Benefits

- ▶ Faster ROI using more capacity in less spectrum
- ▶ Best-in-Class Price/Functionality Ratio
- ▶ Savings on third-party networking equipment
- ▶ Pure IP transport, allowing simultaneous transmission of data, video and voice services
- ▶ High MTBF, less resources needed for servicing and maintenance
- ▶ Flexible frequency planning and high spectral efficiency, reducing licensing costs
- ▶ Ultra-low latency and jitter, optimal for video and voice data transmitting
- ▶ Easy and fast deployment








© 2016 InfiNet Wireless. All rights reserved.

InfiMAN 2x2 and all product and service names referenced herein are either registered trademarks or trade names of InfiNet Wireless. All other trademarks are property of their owners. The content herein is subject to change without further notice.

InfiNet Wireless
sales@infinetwireless.com
www.infinetwireless.com

FAMILY COMPONENT	InfI MAN 2x2 3 GHz Base Station		InfI MAN 2x2 3 GHz Subscriber Terminals	
Model	R5000-Mmxb	R5000-Omxb	R5000-Smnc	R5000-Lmnc
Device description	High-capacity 14 dBi 90 deg flat panel integrated sector antenna base station	High-capacity external antenna base station	Medium-capacity 19 or 22 dBi integrated antenna subscriber terminal	Medium-capacity external antenna subscriber terminal
Performance	<ul style="list-style-type: none"> Up to 240 Mbps sector net throughput 		<ul style="list-style-type: none"> 8 Mbps (up to 8 Mbps net) 20 Mbps (up to 20 Mbps net) 50 Mbps (up to 50 Mbps net) 300 Mbps (up to 180 Mbps net) License upgradeable 	
Distance	<ul style="list-style-type: none"> Middle-to-long range (in excess of 20 km) 	<ul style="list-style-type: none"> Middle-to-long range (in excess of 25 km) 	<ul style="list-style-type: none"> Short-to-Middle range (up to 12 km) 	<ul style="list-style-type: none"> Middle-to-long range (in excess of 25+ km)
Radio	<ul style="list-style-type: none"> Transmit power: up to 23 dBm Receiver sensitivity: -70..-97 dBm Frequency bands: <ul style="list-style-type: none"> › 3.1-3.4 GHz › 3.4-3.7 GHz › 3.7-3.9 GHz › 3.9-4.0 GHz Channel bandwidth: 3.5/5/7/10/14/15/20/28/30/40 MHz Centre frequency adjustment step: 125 kHz Channel duplex: TDD 			
Antenna	<ul style="list-style-type: none"> 14 dBi dual-pol 90° sector antenna 	<ul style="list-style-type: none"> 2 x N-type (Female) connectors for external antenna 	<ul style="list-style-type: none"> 19 and 22 dBi dual-pol integrated antenna 	<ul style="list-style-type: none"> 2 x N-type (Female) connectors for external antenna
Wired interfaces	<ul style="list-style-type: none"> Gigabit Ethernet port (10/100/1000 Base-T) RJ-45 connector Serial port (RS-232) 		<ul style="list-style-type: none"> 2x Fast ethernet (10/100 Base-T) PoE output at the second Ethernet port RJ-45 connector 	
Power consumption	<ul style="list-style-type: none"> Consumption: Up to 12 Watts Power options: 110-240 VAC @ 50/60 Hz ±43..56 VDC IEEE 802.3 at 		<ul style="list-style-type: none"> Consumption: Up to 7 Watts Power options: 110-240 VAC @ 50/60 Hz +9..56 VDC 	

FAMILY COMPONENT	InfIMAN 2x2 3 GHz Base Station		InfIMAN 2x2 3 GHz Subscriber Terminals	
Model	R5000-Mmxb	R5000-Omxb	R5000-Smnc	R5000-Lmnc
Form factor and dimensions	Outdoor Unit (ODU) R5000-Mmxb 90 deg sector antenna  371 x 371 x 90 mm, 3.4 kg	Outdoor Unit (ODU) R5000-Omxb External antenna  240 x 240 x 57 mm, 2.2 kg	Outdoor Unit (ODU) R5000-Smnc 22 dBi antenna  371 x 371 x 83 mm, 2.8 kg	Outdoor Unit (ODU): R5000-Lmnc External antenna  240 x 240 x 50 mm, 1.6 kg
			R5000-Smnc 19 dBi antenna  305 x 305 x 74 mm, 2.3 kg	
		Indoor Unit (IDU-BS-G) 125 x 72 x 38 mm, 0.3 kg		Indoor Unit (IDU-CPE) 85 x 78 x 36 mm, 0.15 kg

Specification

RADIO

- ▶ Voice/RTP Aware Superpacketting
- ▶ DFS
- ▶ Automatic Bitrate Control
- ▶ Automatic Transmit Power Control
- ▶ Automatic Distance Learning
- ▶ Channel Time Adjustment
- ▶ Spectrum Analyser mode
- ▶ Channel testing tools

ENVIRONMENTAL

- ▶ Outdoor Units: -40..+60°C, 100% humidity, condensing
- ▶ Indoor Unit: 0..+40°C, 95% humidity, non-condensing

MAC

- ▶ Dynamic adaptive polling
- ▶ Pseudo-radio Interface
- ▶ Automatic over-the-air firmware upgrade

NETWORKING

- ▶ Ethernet-over-IP and IP-over-IP tunneling
- ▶ ARP protocol support
- ▶ MAC/IP filtering
- ▶ Full-fledged 2nd layer switch
- ▶ RIPv2 / OSPFv2 /static routing
- ▶ L2/L3 Firewall
- ▶ NAT (multipool, H.323-aware)
- ▶ DHCP client/server/relay

QUALITY-OF-SERVICE

- ▶ 17 priority queues
- ▶ IEEE 802.1p support
- ▶ IP TOS / DiffServ support
- ▶ Full voice support
- ▶ Traffic limiting (absolute, relative, mixed)
- ▶ Traffic redirection

SECURITY FEATURES

- ▶ Storm / flood protection
- ▶ Password protection
- ▶ Secure command-line access via SSH protocol

